




## THERMORESISTANT KLL 125

Hose made of polyester textile covered with PVC with galvanised steel spiral between two layers of tissue, for air-conditioning, suction of fumes and warm air.

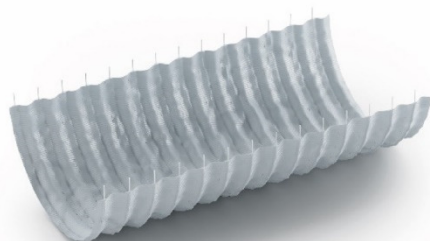

SMOOTH SURFACES

★★



FLEXIBILITY

★★★★★



ABRASION RESISTANCE

★★



TEMPERATURE RANGE

-5°C +80°C  
for short periods up to  
-20°C +110°C



CRUSHING RESISTANCE

★★★



SELF-EXTINGUISHING

DM 26.06.1984 with test  
methods UNI 8457-  
8757/A1-9174-9174/A1.

Ø I/D	Ø I/D	Ø O/D	Wall Thickness	Weight	Bending Radius	Working Pressure 1:3 23°C	Vacuum 23°C	Coil Length
Inch	mm	mm	mm	g/m	mm	bar	m h2o	m
	40	44	0.22	85	20	0.55	1	12
2	51	54	0.22	105	25	0.5	0.95	12
2 1/2	63	66	0.22	130	31	0.45	0.9	12
	70	73	0.22	145	35	0.43	0.85	12
3	76	79	0.22	155	36	0.4	0.8	12
	82	85	0.22	170	41	0.38	0.75	12
3 1/2	89	92	0.22	180	44	0.3	0.7	12
4	102	105	0.22	215	51	0.25	0.65	12
	114	117	0.22	240	57	0.21	0.55	12
	121	124	0.22	255	60	0.2	0.5	12
5	127	130	0.22	265	63	0.18	0.45	12
	133	136	0.22	280	66	0.16	0.4	12
	140	143	0.22	295	70	0.15	0.38	12
6	152	156	0.22	380	76	0.14	0.35	12



## THERMORESISTANT KLL 125

∅ I/D	∅ I/D	∅ O/D	Wall Thickness	Weight	Bending Radius	Working Pressure 1:3 23°C	Vacuum 23°C	Coil Length
Inch	mm	mm	mm	g/m	mm	bar	m h2o	m
	165	169	0.22	420	82	0.12	0.3	12
	178	182	0.22	450	89	0.1	0.25	12
8	203	207	0.22	510	101	0.08	0.2	12
9	228	232	0.22	570	114	0.06	0.15	12
10	254	258	0.22	640	127	0.05	0.12	12
	279	283	0.22	700	139	0.04	0.1	12
12	304	308	0.22	770	152	0.03	0.05	12

All technical specifications apply to a temperature of 23°C ± 2°C (ISO 291). - Tolerance on all specifications ± 5%.